## **EUROPEAN PATENT OFFICE**

## **Patent Abstracts of Japan**

**PUBLICATION NUMBER** 06223805 **PUBLICATION DATE** 12-08-94

APPLICATION DATE 21-01-93 **APPLICATION NUMBER** 05027554

APPLICANT: YUASA CORP;


INVENTOR: MURATA KAZUO;

INT.CL. : H01M 2/22 H01M 2/10 H05K 1/02

H05K 1/18 H05K 3/06

: BATTERY INTEGRATED TYPE TITLE

> PRINTED CIRCUIT BOARD AND MANUFACTURE THEREOF

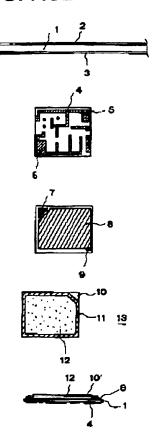

ABSTRACT: PURPOSE: To form an apparatus into a thin type and decrease the connection resistance of a battery to the apparatus by forming metal films of specific thickness on both side surfaces of a resin film, and adopting one surface thereof as an electric circuit wiring part and the other surface as a current collector of a battery.

> CONSTITUTION: Metal films 2, 3 each having thickness of 10µm or less are formed on both side surfaces of a resin film 1. Next, a patterned electric circuit wiring part 4 and through-holes 5, 6 are formed on both the surfaces by photo-etching. Resistors, capacitors, elements and the like are connected to by soldering or directly formed on the wiring part 4 on the surface, while a positive electrode terminal part 7, a negative electrode current collector 8 and a negative electrode terminal part 9 are formed on the reverse surface. Then, a half cell wherein a positive electrode active material, an electrolyte and a negative electrode active material 12 are laminated except on a positive electrode terminal 10 part is bonded to the reverse surface of the wiring part 4 by means of an adhesive agent 11. Consequently, a printed circuit board which can be formed into a thin type and to which the connection resistance of a battery is small can be provided.

COPYRIGHT: (C)1994,JPO&Japio